



HAOZHISENG AUDIO

www.hzsaudio.com

H2S & H2L SERIES

DSP Plate Amplifier · User Manual

CONTENTS

Important Note	02
Input and Output	03
Output Connections & Installation Dimensions.....	04
H2S Installation Dimensions	05
PC Interface · Overview	06
PC Interface · Processing	07
PC Interface · EQ & Limiter	08
Specifications	09

Important Note

Important Note

WARNING NOTICES

SAFEGUARDS

Electrical energy can perform many useful functions, This unit has been engineered and manufactured to assure your personal safety. Improper use can result in potential electrical shock or fire hazards. In order not to defeat the safeguards, observe the following precautions for its installation, use and servicing.

Explanation of Graphical Symbols



CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN



CAUTION
RISK OF ELECTRIC SHOCK :
OPEN ONLY IF QUALIFIED
ASSERVICE PERSONNEL

**WARNING : TO PREVENT FIRE OR ELECTRIC SHOCK , DO NOT EXPOSE
THIS EQUIPMENT TO RAIN OR MOISTURE**

IMPORTANT NOTE

ATTENTION : This unit must be protected from damp because of the risk of fire and the possibility of electric shocks.

1. Make sure that you have the correct mains voltage. Only operate the unit at the mains voltage marked on the rear panel.
2. Make sure that nothing especially no metal objects are inserted into the device. This could result in electric shock or malfunction.
3. If the unit is subjected to extreme fluctuations of temperature e.g. On being transported from outside into a heated room, condensation can form. This unit should not be used until it has reached room temperature.
4. In the event of water or any other fluid being accidentally spilt on the unit switch the unit off immediately and send it to a qualified service workshop for inspection.
5. Make sure that the unit is always well ventilated and never exposed to direct sunlight.
6. Do not use sprays to clean the unit as they have a detrimental effect on the unit and could ignite suddenly.
7. The machine use single power switch, please cut off the power before fix.
8. Please do not put the cup, vessel of flower or container above the machine, in case the leak out water then cause the leakage current off the machine.


Input and Output

Input and output

H2L H2L-SUB8 H2L-SUB4 H2L-TWO Front Panel



H2S H2S-SUB8 H2S-SUB4 H2S-TWO Front Panel

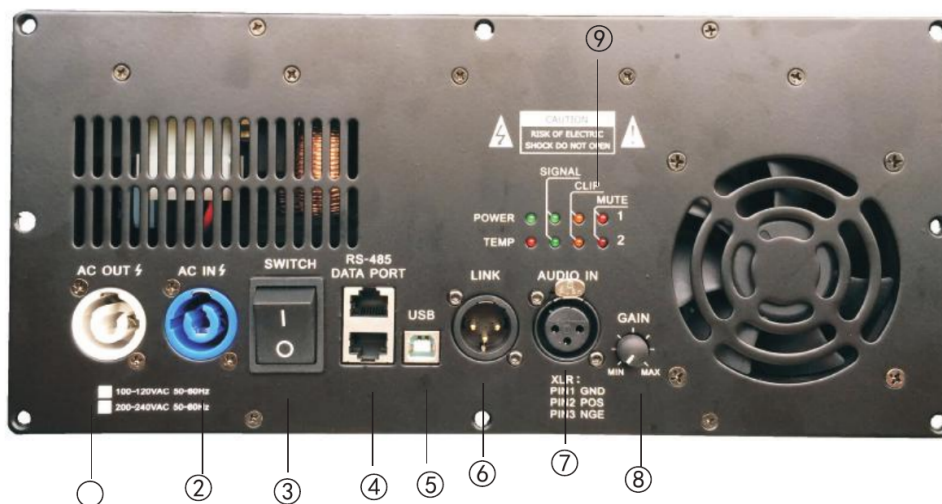

1. POWER SUPPLY LINK
2. POWER SUPPLY INPUT
3. POWER SWITCH
4. 485 DATA CONTROL INPUT AND OUTPUT
5. USB DATA CONTROL INPUT
6. AUDIO LINK OUTPUT
7. AUDIO INPUT
8. GAIN CONTROL
9. LED INDICATORS

Input and output

Installation dimension

Output connections

H2S
H2S-SUB8
H2S-SUB4
H2S-TWO

① Ch1 + = POSITIVE

④ Ch2 - = NEGATIVE




H2L
H2L-SUB8
H2L-SUB4
H2L-TWO

① Ch1 OUT POSITIVE

② Ch1 OUT NEGATIVE

③ Ch2 OUT POSITIVE

④ Ch2 OUT NEGATIVE

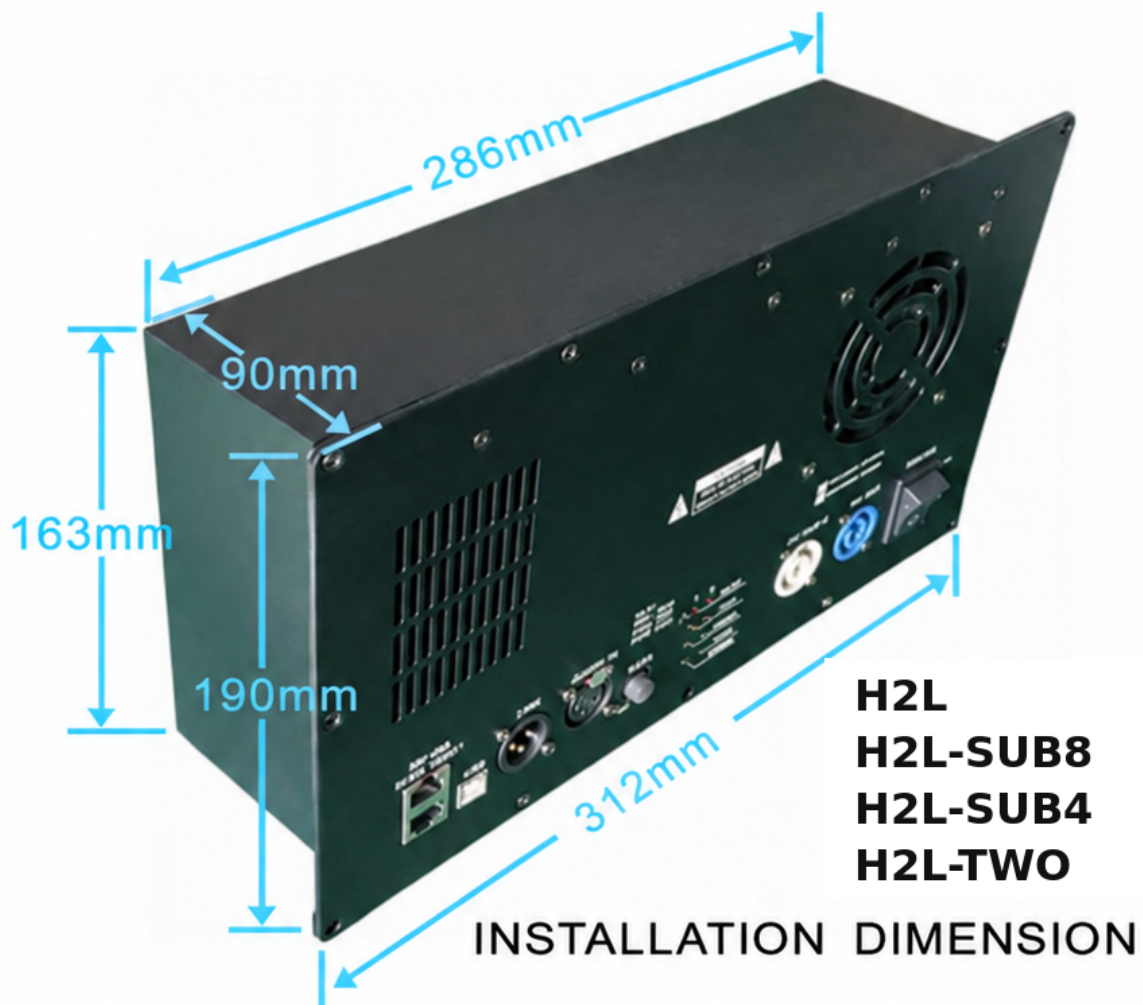

H2S Installation Dimensions



H2S SERIES

DSP PLATE AMPLIFIER · INSTALLATION DIMENSIONS

www.hzsaudio.com


H2S

H2S-SUB8

H2S-SUB4

H2S-TWO




PC Interface · Overview

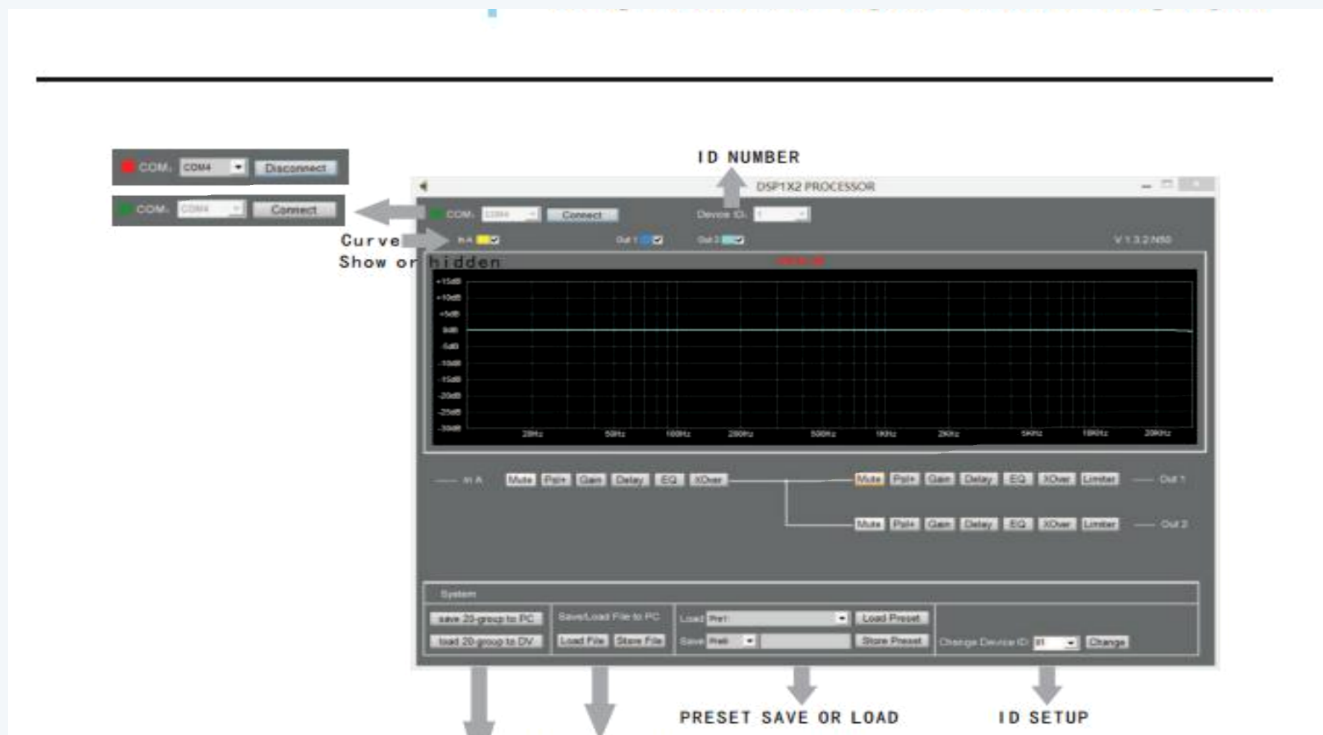

USB / RS-485 DSP management interface




PC Interface · Processing

PC interface

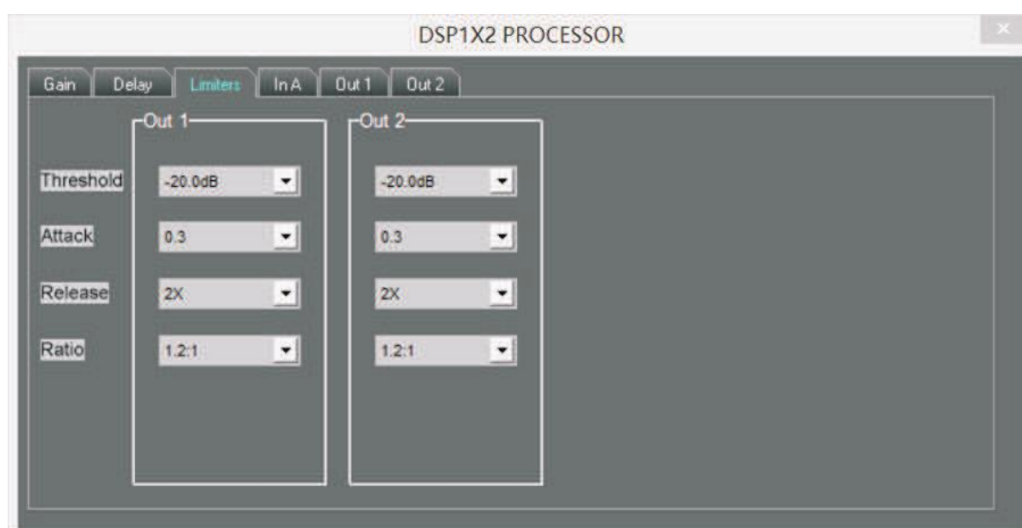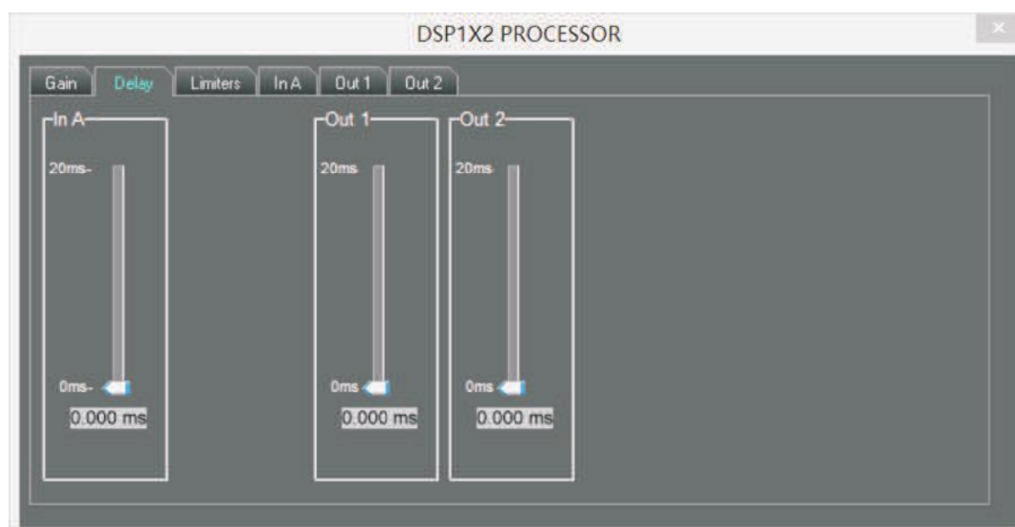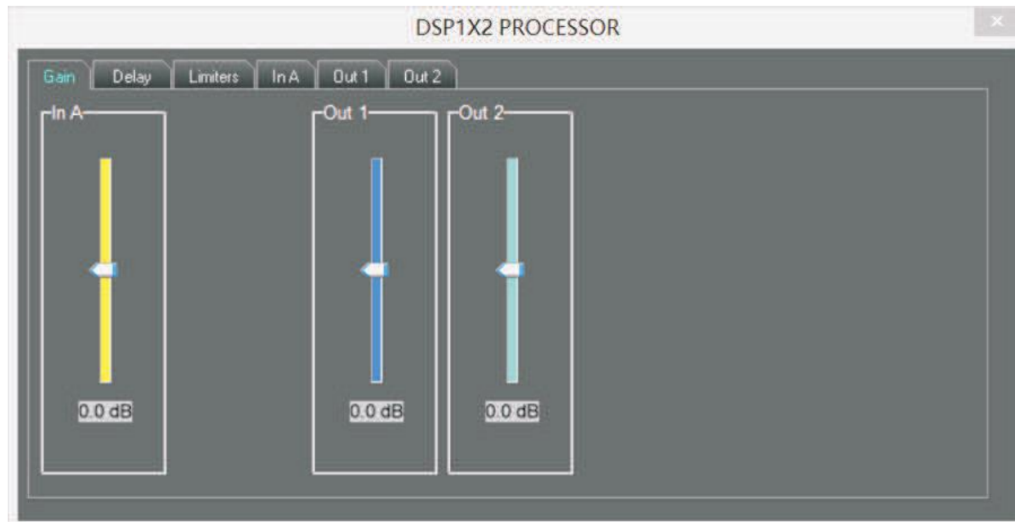

PC Interface · EQ & Limiter

PC interface

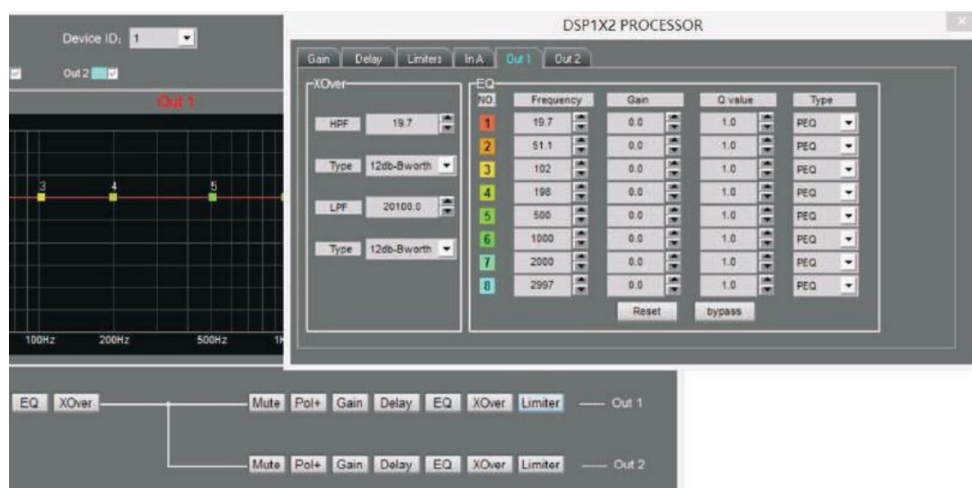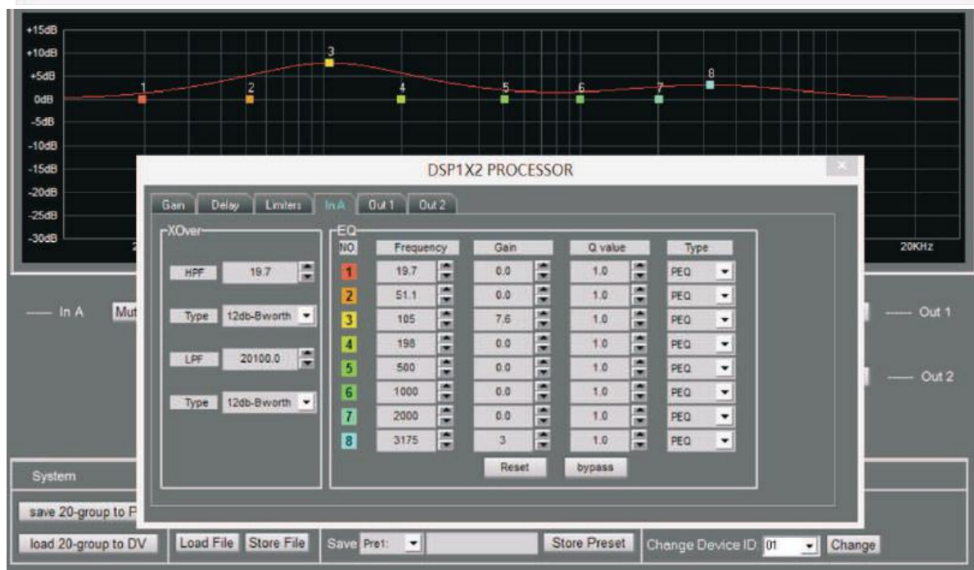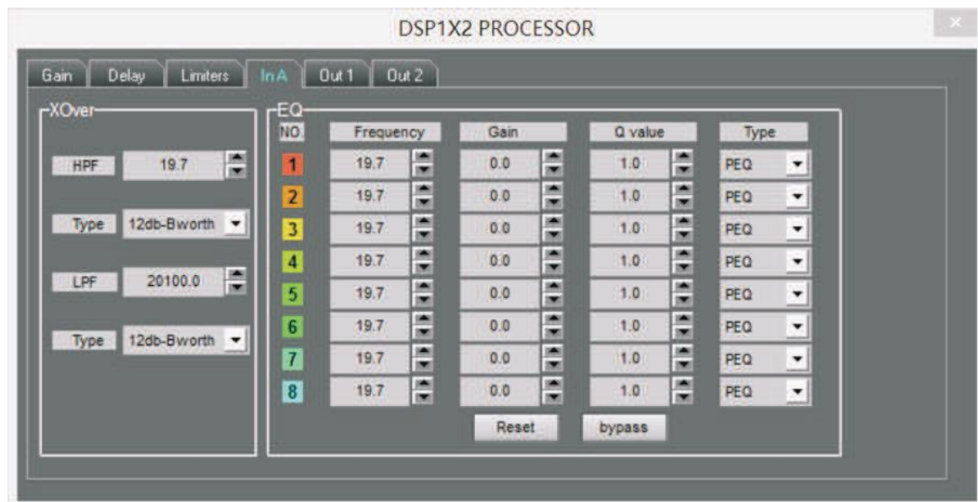



Specifications

H2L SERIES

ITEM / MODEL	H2L	H2L-SUB8	H2L-SUB4	H2L-TWO
8Ω Power	2×500W	1×1600W	1×900W	2×500W
4Ω Power	2×900W	Nonsupport 4Ω	1×1800W	2×900W
Frequency Response	20Hz-20KHz ±1dB			
THD+N 1KHz 1W 8Ω	<0.1%			
Signal to Noise Ratio 1KHz	>100dB			
Channel Separation 1KHz	>80dB			
Class	D			
Protection	Short,DCP,OVP,UDP,OC,OTP			
Operating Voltage	90V-135V / 180V-265V			
Input Sensitivity	0.77V			
Input Impedance	20KΩ			
DSP Fuction	MUTE,Polarity,Gain,Delay,Limiter,Mixer,EQ,XOver			
DSP Control	USB and RS-485			
Dimensions(W×H×D)	312×190×90mm			
Packing Dimension	350×210×120mm			
Net Weight(kg)	3.8			
Gross Weight(kg)	4.8			

H2S SERIES

ITEM / MODEL	H2S	H2S-SUB8	H2S-SUB4	H2S-TWO
8Ω Power	2×500W	1×1600W	1×900W	2×500W
4Ω Power	2×900W	Nonsupport 4Ω	1×1800W	2×900W
Frequency Response	20Hz-20KHz ±1dB			
THD+N 1KHz 1W 8Ω	<0.1%			
Signal to Noise Ratio 1KHz	>100dB			
Channel Separation 1KHz	>80dB			
Class	D			
Protection	Short,DCP,OVP,UDP,OC,OTP			
Operating Voltage	90V-135V / 180V-265V			
Input Sensitivity	0.77V			
Input Impedance	20KΩ			
DSP Fuction	MUTE,Polarity,Gain,Delay,Limiter,Mixer,EQ,XOver			
DSP Control	USB and RS-485			
Dimensions(W×H×D)	312×140×126mm			
Packing Dimension	350×170×160mm			
Net Weight(kg)	3.6			
Gross Weight(kg)	4.6			